




817-599-0056

orders@ngi.us.com


Electrical XL Flashing

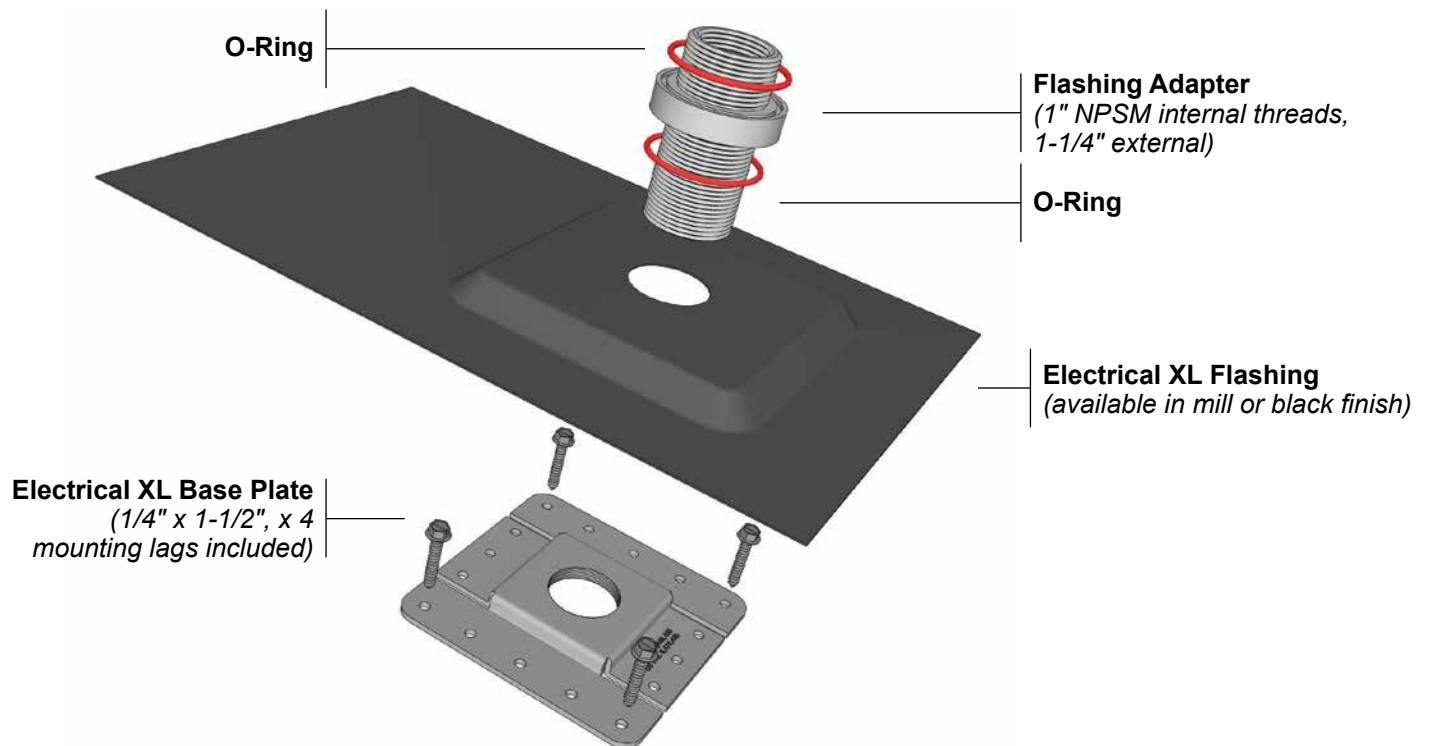






Electrical XL Flashing Assembly is unlike any Flashing on the market. No more ugly, leaky rubber boots! Quick, simple, secure: the Electrical XL Flashing Assembly eliminates leaking.

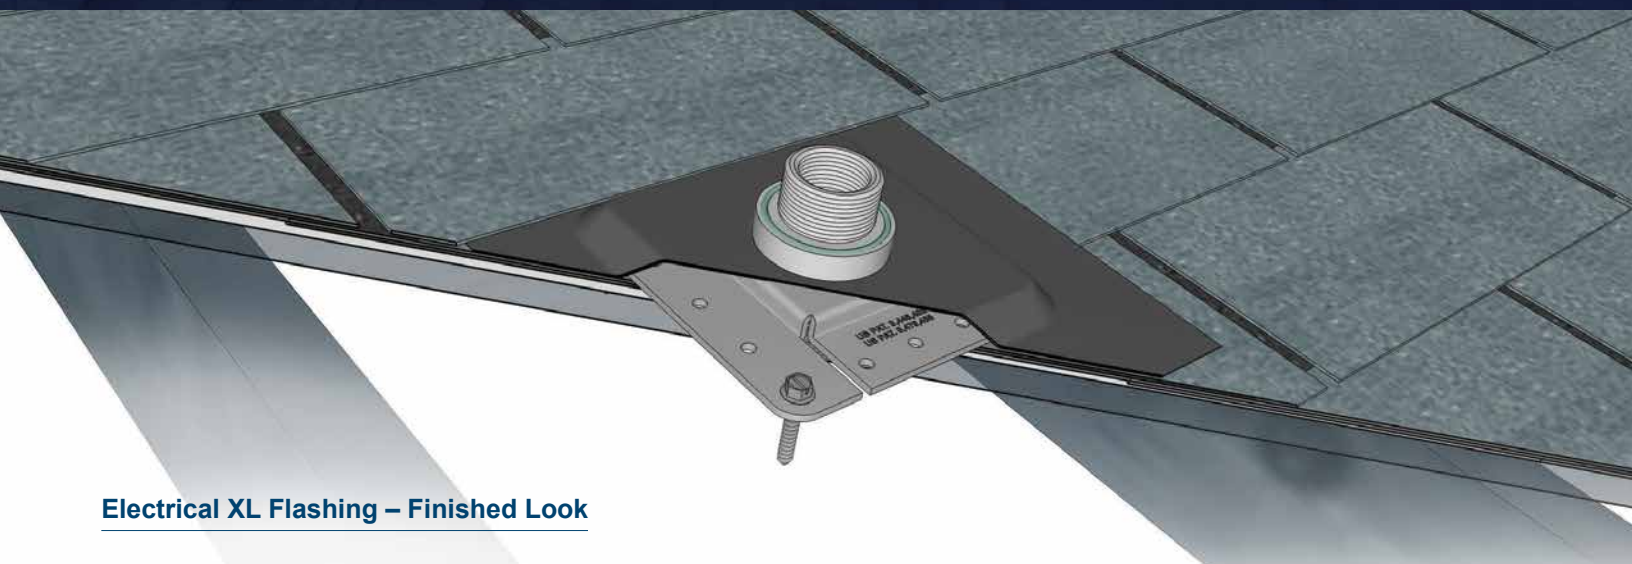- Run Electrical through the roof or walls without leaks
- No leaky rubber boots or UV damage
- Mounts flush to the roof or vertical wall
- Flashing Adapter seals to Flashing
- Threads directly to a 1-1/4" Conduit Body¹
- Mount Junction/Combiner Boxes¹ securely without leaks
- Compatible with standard fittings and grounding components
- Ideal for use with shingles or siding
- Other applications: satellite dish cables, weather monitoring equipment, ham radio wiring, ethernet cabling, etc.
- Available for metal roofs


¹ Conduit Body and Junction Box not included.



Electrical XL Flashing – Finished Look

PARTS INCLUDED IN THE ASSEMBLY		MATERIALS	COLOR
	Flashing Adapter	Aluminum	Mill AL
	Electrical XL Flashing <i>(not included for metal roofs)</i>	Aluminum	Mill AL
			Black
	Electrical XL Base Plate <i>(lags included)</i>	Aluminum	Mill
	O-Rings <i>(two included)</i>	High Temperature Polymer	Red/Black
	Mounting Lags <i>(four included)</i>	Zinc	Zinc

Side View of Assembly Installed on Asphalt Shingle

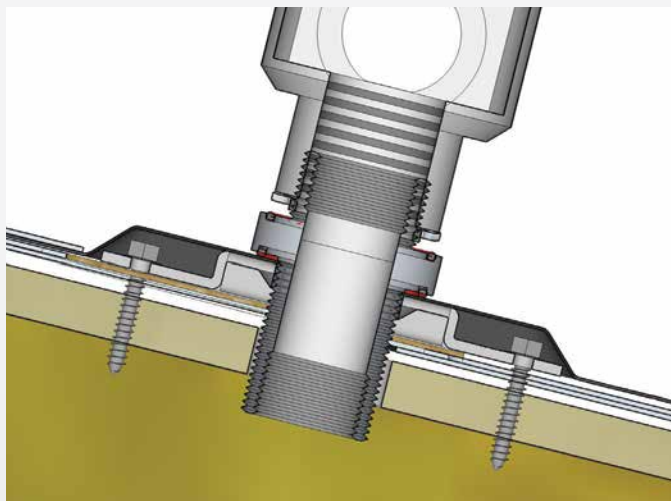

Side View of Assembly Installed on Metal Roof

